






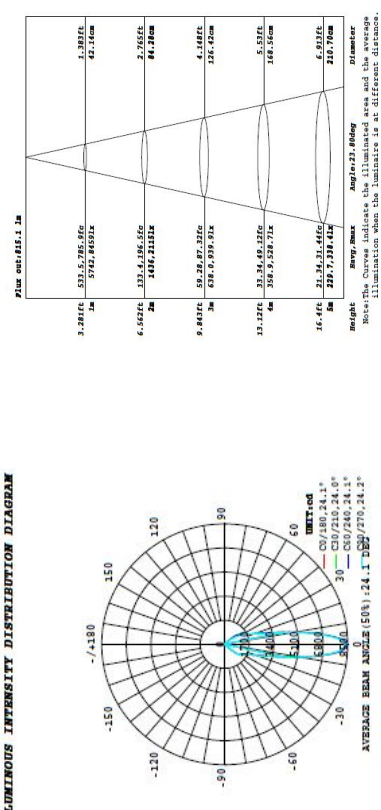









## LED Downlight Price Lists ( 2017-A)

One Stop for Commercial Lighting - Professional & High Quality		Model No. Naming reference:					
<p><b>DLC series</b> Curved surface</p> 	<p><b>DLH series</b> Hotel solution</p> 	<p><b>DLHQ series</b> Hotel solution square</p> 	<p><b>DLT series</b> large adjustable angle</p> 	<p><b>DLO series</b> Surface mounted</p> 	<p><b>Philips driver</b> Xitanium - 5 Years warranty</p> 	<p><b>0-10V dimmable</b> driver and dimmer</p> 	<p><b>Series:</b> DLC: Curved surface, downlight adjustable DLH: Hotel solution, DLT: Trunk type, downlight adjustable DLO: Surface mounted downlight</p>
<p><b>IES file and quality photos support</b></p>							
 <p><b>LUMINOUS INTENSITY DISTRIBUTION DIAGRAM</b></p> <p>Flux out: 652.1 lm</p> <p>3.281 Ft. 570.5, 205.0 Ft. 1.007 Ft. 2m 5.142, 1.852K 42.140m</p> <p>6.562 Ft. 133.4, 106.5 Ft. 2.265 Ft. 2m 1417, 2135K 81.28m</p> <p>9.843 Ft. 59.28, 87.32 Ft. 4.148 Ft. 2m 678.0, 899.91K 126.45m</p> <p>13.124 Ft. 37.34, 69.32 Ft. 5.971 Ft. 2m 358.9, 528.71K 146.90m</p> <p>16.405 Ft. 25.55, 51.10 Ft. 6.875 Ft. 2m 239.7, 334.14K 210.75m</p> <p>Height: 1000mm Beam angle: 24.1° Beam diameter: 24.1cm</p> <p>AVERAGE BEAM ANGLE(S): 24.1° CB5/270, 24.2°</p> <p>UNIT: cd C0/180, 24.1° C90/270, 24.1° C0/0, 24.1° C90/90, 24.1°</p>							
<p>Example: HYR-DLC35W CR80</p> <p>HYR- Company HYRWELL</p> <p>DLC - downlight C series</p> <p>35W - wattage 35 watts</p> <p>CR80 - CREE LED Ra&gt;80 ( 90Ra is not available)</p> <p>EP80 - EPISTAR chip Ra80/ EP90-EPISTAR chip Ra90</p> <p>DG- Digital IR remote control</p> <p>TR - TRIAC dimmable / MW- Meanwell brand driver</p> <p><b>CREE COB ( USA CREE): 2700K/ 3000K/4000K/ 5000K&gt;80Ra</b></p> <p><b>EPISTAR: 2700K/ 3000K/ 4000K/ 6000K @ 80Ra/ 90Ra</b></p> <p><b>DG- digital RF remote control: 6-50W or more</b></p> <p><b>TR - TRIAC dimmable: 6-50W max</b></p>							
							

~ Hotel solution ( perfect for hotel lighting- 80Ra+ / 90Ra+ ) - <span style="color: blue;">★ standard with CE.TUV. SAA. CB certified driver. years warranty!</span>												
( 1 ) DLH series	Watts	Price <500pcs	Price Dimmable TRIAC mode	Model No.	Dimension	Cutting hole	Beam angle	Input Voltage	LED chip	Lumens ( ±100lm )	CCT & CRI ( 80Ra+ / 90Ra+ )	Package( CTN )
	9W (R)			HYR-DLH09R CR80	D90 H85 mm	ø72mm	18° / 36°	AC200~240V	CREE	750lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	12W (R)			HYR-DLH12R CR80	D90 H85 mm	ø72mm	18° / 36°	AC200~240V	CREE	1000 lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	9W (S)			HYR-DLH09S CR80	L83*W83*H85	ø72mm	18° / 36°	AC200~240V	CREE	750lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	12W (S)			HYR-DLH12S CR80	L83*W83*H85	ø72mm	18° / 36°	AC200~240V	CREE	1000 lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	9W (X)			HYR-DLH09X CR80	D88*H85 mm	ø72mm	18° / 36°	AC200~240V	CREE	750lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	12W (X)			HYR-DLH12X CR80	D88*H85 mm	ø72mm	18° / 36°	AC200~240V	CREE	1000 lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	9W (Y)			HYR-DLH09Y CR80	L83*W83*H85	ø72mm	18° / 36°	AC200~240V	CREE	750lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	12W (Y)			HYR-DLH12Y CR80	L83*W83*H85	ø72mm	18° / 36°	AC200~240V	CREE	1000 lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	9W (B)			HYR-DLH09B CR80	D98 H92 mm	ø88mm	18° / 36°	AC200~240V	CREE	800lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8kg/CTN) 39.5*27*39cm V10
	12W (B)			HYR-DLH12B CR80	D98 H92 mm	ø88mm	18° / 36°	AC200~240V	CREE	1100 lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	9W (C)			HYR-DLH09C CR80	D98 H92 mm	ø88mm	18° / 36°	AC200~240V	CREE	800lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8kg/CTN) 39.5*27*39cm V10
	12W (C)			HYR-DLH12C CR80	D98 H92 mm	ø88mm	18° / 36°	AC200~240V	CREE	1100 lm	2700K/3000K/4000K/5000K @ >80Ra ( 90Ra+ ) \$	18PCS (8.5kg/CTN) 39.5*27*39cm V10
	12W 1 LEDs			HYR-DLH12Q CR80	L115 W115 H90	L95 W95	24° / 38°	AC200~240V	CREE	1100 lm	2700K/3000K/4000K/5000K @ >80Ra	
	24W 2 LEDs			HYR-DLH24Q CR80	L115 W210 H90	L95 W190	24° / 38°	AC200~240V	CREE	2250 lm	2700K/3000K/4000K/5000K @ >80Ra	
	36W 3 LEDs			HYR-DLH36Q CR80	L115*W300*H90	L95* W280	24° / 38°	AC200~240V	CREE	3200lm	2700K/3000K/4000K/5000K @ >80Ra	
	25W 1 LEDs			HYR-DLH25Q CR80	L135 W135 H120	L115 W115	15° / 24° 38°	AC200~240V	CREE	2300 lm	2700K/3000K/4000K/5000K @ >80Ra	
	50W 2 LEDs			HYR-DLH50Q CR80	L135 W250 H120	L115 W230	15° / 24° 38°	AC200~240V	CREE	4200lm	2700K/3000K/4000K/5000K @ >80Ra	
	75W 3 LEDs			HYR-DLH75Q CR80	L135*W365*H120	L115*W245	15° / 24° 38°	AC200~240V	CREE	6500lm	2700K/3000K/4000K/5000K @ >80Ra	
DLHQ												
												
												
	DLH family		adjustable on one side								perfect lighting environment for hotel, anti-glare	

~ Curved surface, adjustable <b>CREE COB</b>										<b>CREE</b>		★ standard with <b>CE,TUV, SAA, CB</b> certificated driver, <u>    </u> years warranty!									
( 2 ) DLC series	Picture White/ black color	Watts	Price <500pcs	Price Dimmable TRIAC mode	Model No.	Dimension	Cutting hole	Beam angle	Input Voltage	LED chip	Lumens ( ±100lm )	CCT & CRI ( >80Ra only )	Package( CTN )								
D95		6W			HYR-DLC06W CR80	D95 H63 mm	ø68mm	30°	AC200~240V	<b>CREE</b>	580lm	2700K/3000K/4000K/5000K @ >80Ra ( <b>90Ra+1S</b> )	36pcs (11.2kg/CTN) 42.5*38*31.5cmV12.3								
		9W			HYR-DLC09W CR80	D95 H63 mm	ø68mm	30°	AC200~240V	<b>CREE</b>	800lm	2700K/3000K/4000K/5000K @ >80Ra ( <b>90Ra+1S</b> )	36pcs (11.2kg/CTN) 42.5*38*31.5cmV12.3								
D111		12W			HYR-DLC12W CR80	D111 H86 mm	ø80mm	24° / 36°	AC200~240V	<b>CREE</b>	1100 lm	2700K/3000K/4000K/5000K @ >80Ra ( <b>90Ra+1S</b> )	18PCS (8kg/CTN) 39.5*27*39cm V10								
D119		15W			HYR-DLC15W CR80	D119 H103 mm	ø90mm	15°/24° 38° / 60°	AC200~240V	<b>CREE</b>	1360 lm	2700K/3000K/4000K/5000K @ >80Ra	18pcs (10.5kg/CTN) 39.5*27*39cm V10								
		15W PHILIPS driver			HYR-DLC15WPH CR80	D119 H103 mm	ø90mm	15°/24° 38° / 60°	AC200~240V	<b>CREE</b>	1360 lm	2700K/3000K/4000K/5000K @ >80Ra	18pcs (11kg/CTN) 39.5*27*39cm V10								
D142		20W			HYR-DLC20W CR80	D142 H122 mm	ø110mm	24° / 60°	AC200~240V	<b>CREE</b>	1900 lm	2700K/3000K/4000K/5000K @ >80Ra	18PCS (14kg/CTN) 47.5x31.5x43cm V15.3								
		25W PHILIPS driver			HYR-DLC25W CR80	D142 H122 mm	ø110mm	24° / 60°	AC200~240V	<b>CREE</b>	2300 lm	2700K/3000K/4000K/5000K @ >80Ra	18PCS (14kg/CTN) 47.5x31.5x43cm V15.3								
D180		20W PHILIPS driver			HYR-DLC20WPH CR80	D142 H122 mm	ø110mm	24° / 60°	AC200~240V	<b>CREE</b>	1900 lm	2700K/3000K/4000K/5000K @ >80Ra	18PCS (15kg/CTN) 47.5x31.5x43cm V15.3								
		35W			HYR-DLC35W CR80	D180 H133 mm	ø145mm	15°/24° 38° / 60°	AC200~240V	<b>CREE</b>	3000 lm	2700K/3000K/4000K/5000K @ >80Ra	8pcs (10.5kg/CTN) 41.5*41.5*32cm V13.2								
D193		35W PHILIPS driver			HYR-DLC35WPH CR80	D180 H133 mm	ø145mm	15°/24° 38° / 60°	AC200~240V	<b>CREE</b>	3000 lm	2700K/3000K/4000K/5000K @ >80Ra	8pcs (10.5kg/CTN) 41.5*41.5*32cm V13.2								
		50W			HYR-DLC50W CR80	D193 H134 mm	ø158mm	24°/ 38° / 60°	AC200~240V	<b>CREE</b>	4200 lm	2700K/3000K/4000K/5000K @ >80Ra	8pcs (13kg/CTN) 45.5*45.5*32cm V15.7								
D90-DLS		45W PHILIPS driver			HYR-DLC45WPH CR80	D193 H134 mm	ø158mm	24°/ 38° / 60°	AC200~240V	<b>CREE</b>	3800 lm	2700K/3000K/4000K/5000K @ >80Ra	8pcs (13kg/CTN) 45.5*45.5*32cm V15.7								
		6W			HYR-DLS06W CR80	D90 H67 mm	ø70mm	15°/24° 38° / 60°	AC200~240V	<b>CREE</b>	580lm	2700K/3000K/4000K/5000K @ >80Ra	36pcs (11.6kg/CTN) 42.5*38*31.5cmV12.3								
		9W			HYR-DLS09W CR80	D90 H67 mm	ø70mm	15°/24° 38° / 60°	AC200~240V	<b>CREE</b>	800lm	2700K/3000K/4000K/5000K @ >80Ra	36pcs (11.6kg/CTN) 42.5*38*31.5cmV12.3								



DLC family



adjustable



PVC protect chip



locked connector



back heatsink



high quality CE driver



non-hlogo printed box for each model



production



CREE with brand name on board to identify



CREE with brand name on board to identify

★ standard with CE,TUV, SAA, CB certified driver, years warranty!													
~ Large angle adjustable solution, trunk type downlight													
( 3 ) DLT series	Picture White color	Watts	Price <500pcs	Price Dimmable TRIAC mode	Model No.	Dimension	Cutting hole	Beam angle	Input Voltage	LED chip	Lumens ( ±100lm )	CCT & CRI ( >80Ra only )	Package( CTN )
D114		12W			HYR-DLT12W CR80	D114 H90mm	100mm	10° / 24° 38°	AC200~240V	CREE	1100 lm	2700K / 3000K / 4000K / 5000K @ >80Ra (90Ra+1S)	18pcs (10kg/CTN) 39.5*27*39cm V10
		15W			HYR-DLT15W CR80	D114 H90mm	100mm	10° / 24° 38°	AC200~240V	CREE	1350 lm	2700K / 3000K / 4000K / 5000K @ >80Ra (90Ra+1S)	18pcs (10kg/CTN) 39.5*27*39cm V10
D138		20W			HYR-DLT20W CR80	D138 H120mm	128mm	10° / 24° 38°	AC200~240V	CREE	1900 lm	2700K / 3000K / 4000K / 5000K @ >80Ra	18PCS (16.5kg/CTN) 47.5x31.5x43cm V15.3
		25W			HYR-DLT25W CR80	D138 H120mm	128mm	10° / 24° 38°	AC200~240V	CREE	2300 lm	2700K / 3000K / 4000K / 5000K @ >80Ra	18PCS (16.5kg/CTN) 47.5x31.5x43cm V15.3
D165		35W			HYR-DLT35W CR80	D165 H145mm	155mm	10° / 24° 38°	AC200~240V	CREE	3000lm	2700K / 3000K / 4000K / 5000K @ >80Ra	8pcs ( 12kg/CTN ) 38*38*31.5 cm V11
D190		50W			HYR-DLT50W CR80	D190 H155mm	180mm	24° / 60°	AC200~240V	CREE	4200 lm	2700K / 3000K / 4000K / 5000K @ >80Ra	8pcs ( 17kg/ CTN ) 46.5*46.5*43cm V21
		30W (15W*2)			HYR-DLT30WSQ2 CR80	L230*W115	L215*W100	10° / 24° 38°	AC200~240V	CREE	2800 lm	2700K / 3000K / 4000K / 5000K @ >80Ra	
square		50W (25W*2)			HYR-DLT50WSQ2 CR80	L278*W138	L263*W125	10° / 24° 38°	AC200~240V	CREE	4200 lm	2700K / 3000K / 4000K / 5000K @ >80Ra	
		70W (35W*2)			HYR-DLT70WSQ2 CR80	L330*W163	L315*W150	10° / 24° 38°	AC200~240V	CREE	6000 lm	2700K / 3000K / 4000K / 5000K @ >80Ra	
    													
<b>PHILIPS driver</b> , the available wattage and price as below: 15W 20W 30W 45W <b>PHILIPS</b>													


<b>(4) DLO series</b>		~ Surface Mounted downlight- <a href="#">CREE COB</a>										★ standard with <a href="#">CE,TUV, SAA, CB</a> certified driver, <a href="#">years warranty!</a>									
	15W			HYR-DLO15W	CR80	D110 H120mm	Surface Mounted	60°	AC200~240V	<b>CREE</b>	1360 lm	2700K/3000K/4000K/5000K @ >80Ra									
	20W			HYR-DLO20W	CR80	D130 H153mm	Surface Mounted	60°	AC200~240V	<b>CREE</b>	1900 lm	2700K/3000K/4000K/5000K @ >80Ra	12pcs (11kg/CTN) 44.5*30*36cm V11.5								
	28W			HYR-DLO28W	CR80	D130 H153mm	Surface Mounted	60°	AC200~240V	<b>CREE</b>	2600 lm	2700K/3000K/4000K/5000K @ >80Ra	12pcs (11kg/CTN) 44.5*30*36cm V11.5								
	35W			HYR-DLO35W	CR80	D170 H183mm	Surface Mounted	60°	AC200~240V	<b>CREE</b>	3000 lm	2700K/3000K/4000K/5000K @ >80Ra									
<b>(5) DLF series</b>		~ Fixed angle type										★ standard with <a href="#">CE,TUV, SAA, CB</a> certified driver, <a href="#">years warranty!</a>									
	12W			HYR-DLF12W	CR80	D115 H90 mm	ø95 mm	24° / 38° / 60°	AC200~240V	<b>CREE</b>	1100 lm	2700K/3000K/4000K/5000K @ >80Ra	18pcs (9kg/CTN) 39.5*27*39cm V10								
	15W			HYR-DLF15W	CR80	D115 H90 mm	ø95 mm	24° / 38° / 60°	AC200~240V	<b>CREE</b>	1360 lm	2700K/3000K/4000K/5000K @ >80Ra	18pcs (9kg/CTN) 39.5*27*39cm V10								
	20W			HYR-DLF20W	CR80	D142 H95 mm	ø125 mm	24° / 38° / 60°	AC200~240V	<b>CREE</b>	1900 lm	2700K/3000K/4000K/5000K @ >80Ra	18PCS (14kg/CTN) 47.5x31.5x43cm V15.3								
	28W			HYR-DLF28W	CR80	D142 H95 mm	ø125 mm	24° / 38° / 60°	AC200~240V	<b>CREE</b>	2600 lm	2700K/3000K/4000K/5000K @ >80Ra	18PCS (14kg/CTN) 47.5x31.5x43cm V15.3								


**(6) PHILIPS driver**


**Xitanium series- 5 years warranty by Philips**


PHILIPS driver can be fit with all models of downlight as wattage below and price is:


15W  
20W  
30W  
45W



 15W 21W

 30W 32W 36W 44W







**PHILIPS driver features:**

- 1) no-flicker
- 2) PF>0.95
- 3) AC220~240V 50/60Hz
- 4) long life time, 5 year warranty
- 5) CE, CCC, C-TICK, ENEC certified!

**anti-forgery label on each driver**  
check on PHILIPS website:  
[www.authenticity.philips.com](http://www.authenticity.philips.com)

<b>(7) 0-10V dimmable</b>		Global universal standard, suitable with Meanwell, Philips etc 0-10V driver, work with standard kinds of 0-10V dimmer.										
	0-10V dimmable driver	Features (9~50W available)	1) Non-flicker, dimming smooth, PF>0.9, high quality, 3 years warranty 2) 0-10V dimmable, global universal standard, suitable with standard kinds of 0-10V dimmer, just connect the signal line between driver and dimmer (working on dimmable or non-dimmable is both available)									
	Dimmer 0-10V	<b>Dimmer Specification:</b>	1) one dimmer can control the quantity of lamps with no limited 2) with IR remote controller, brightness +/-, or 25%, 50%, 75%, 100% brightness selection, power on/off, delay off 3) dimmable brightness range: 0%~100% 4) 4 types of DIY mode for brightness selection									